



(WH)







Plain Non Perforated

Micro Perforated Hole diameter: 1.5mm Open area: 22%

PHYSICAL DATA AND PERFORMANCE

	Item Number•	Description	Dimensions	Acoustics	Light Reflectance	Pieces/Carton
			Nominal WxLxH	NRC	(White)	
) [F1030M1	100mm Unperforated	100 x 2400 x 16	N/A	0.77	16
	F2030M1	200mm Unperforated	200 x 2400 x 16	N/A	0.77	10
	F3030M1	300mm Unperforated	300 x 2400 x 16	N/A	0.77	6
	F1030M2	100mm Microperforated*	100 x 2400 x 16	0.70	0.61	16
	F2030M2	200mm Microperforated*	200 x 2400 x 16	0.70	0.61	10
	F3030M2	300mm Microperforated*	300 x 2400 x 16	0.70	0.61	6

Material: Galvanized Steel - thickness 0.6mm

Surface Finish: Available in White (RAL9016), Silver Grey (RAL9005). Custom colours available.

Edge Detail: Square with extended flange. To create a Contrasts system, a black Filler Strip is available.

Fire Resistance: Conforms to BCA Spec. C1.10 and tested to AS/NZS3837: 1998 – "Group 1"

Weight: 8.07kgs. m²

• When specifying or ordering, include the appropriate two letter colour suffix (eg F1030M1<u>WH</u> – for White, F1030M1<u>SG</u> – for Silver Grey)

* Microperforated panels feature an unperforated border and include acoustical fleece

SUSPENSION SYSTEM

	Item Number	em Number Description Dimensions (mm)			1)	Pieces/Carton
			Length	Width	Height	
	BP5497M	Carrier Rail	3000	40	40	10
)	BP5498M	Flex Carrier Rail	3000	40	25	10
/	BP5499M	Carrier Rail Joiner	100	38	16	50
	BP5580M	Carrier Rail Hanger Bracket	_	60	75	100
	SCPF	Suspension Clip	_	_	_	100

ACCESSORIES

Item Number	Description		Dimensions (mm	Pieces/Carton	
		Length	Width	Height	
BP5494M	Contrasts Filler Strip (Black)	2400	30	1.6	16
BP5576M	Pressure Spring	65	30	20	50
BP6545M*	100mm Panel End Cap	100	16	25	50
BP6546M*	200mm Panel End Cap	200	16	25	50
BP6547M*	300mm Panel End Cap	300	16	25	50
BP6543*	"E" Wall Moulding	3000	25	50	10
BP6351M	Speed Clip	6	12	3	100
BP5494M	100mm Panel Splice Plate	_	100mm	_	50
BP5496M	200mm Panel Splice Plate	_	200mm	_	50
BP5575M	300mm Panel Splice Plate	_	300mm	_	50

^{) *} When specifying or ordering, include the appropriate two letter colour suffix to match panel.







Fire Resistance



Colour



Acoustical Comfort




Product Handling



Humidity Resistance RH99%


INSTALLATION DETAIL

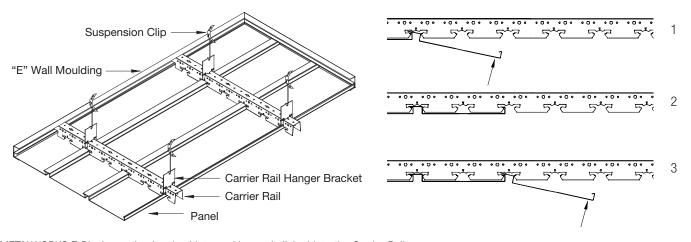

METALWORKS F-Plank are simply raised into position and clicked into the Carrier Rail.

Refer to the METALWORKS F-Plank System Components and also the Assembly and Installation Instructions for more details.

CONTACT

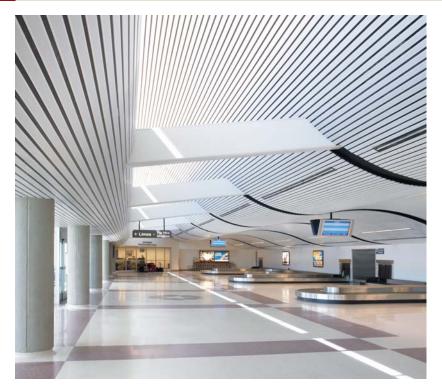

METALWORKS Linear 100mm Ceiling and Wall Systems in White; Dallas Love Field, Dallas, TX



SCAN* THIS CODE to learn more about our METALWORKS F-PLank

*Download a Free QR code reader app available from Apple store

Printed on Maine Recycled Silk paper

©2015 Armstrong World Industries Pty Ltd.

Armstrong World Industries Pty Ltd

Armstrong World Industries Pty. Ltd.

NSW

Armstrong World Industries Pty. Ltd.

99 Derby Street, Silverwater NSW 2128

Telephone (02) 9748 1588 | Facsimile (02) 9748 8449

VIC/TAS

דא/ח וכ

Armstrong World Industries Pty. Ltd.
6 Barrinia Street, Slacks Creek QLD 4127
Telephone (07) 3809 5565 | Facsimile (07) 3809 5507

SA

Total Building Systems Pty. Ltd.

160 Grand Junction Road, Blair Athol SA 5084

Telephone (08) 7325 7555 | Facsimile (08) 7325 7566

WA

Ceiling Manufacturers of Australia Pty. Ltd.
5 Irvine Street, Bayswater WA 6053
Telephone 08) 9271 0777 | Facsimile (08) 9272 2801

New Zealand

Forman Building Systems Ltd.
PO Box 12349, Penrose, Auckland
Telephone 64-9-276 4000 | Facsimile 64-9-276 414

www.armstrongceilings.com.au



AWP0315