

FINE FISSURED AND FINE FISSURED HIGH ACOUSTIC




FINE FISSURED Square Edge with PeakForm™ Prelude™ XL 24mm Exposed Tee grid

BENEFITS

- TOTAL ACOUSTICS™ Performance (NRC+CAC)
 - High sound absorption for reduced reverberation and quieter spaces
 - High sound attenuation, improving room to room privacy
- Cost effective ceiling solution
- Reliable, proven performance
- High light reflective finish
- RH99 Humidity Resistant
- Sustainable – Green Star® contribution

APPLICATION AREAS

- Offices
- Education
- Healthcare
- Corridors
- Libraries

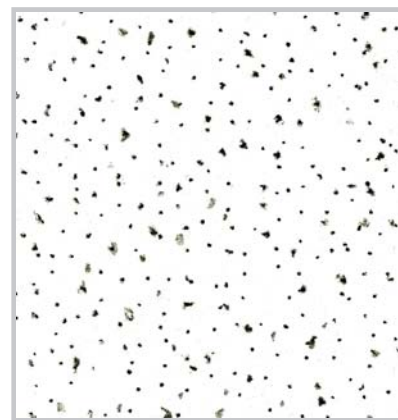

Inspiring Great Spaces®

Armstrong®
CEILING SOLUTIONS

FINE FISSURED AND FINE FISSURED HIGH ACOUSTIC



RH99
Humidity
Resistant



Up to
56%
Recycled Content
EN ISO 14021



85%
Light Reflectance



Acoustical
Comfort



TOTAL
ACOUSTICS™

Panel Options	SQUARE LAY-IN	ANGLED TEGULAR	BEVELLED TEGULAR	
	 Prelude™ 24mm Grid	 Prelude 24mm Grid	 Suprafine™ 15mm Grid	 Silhouette™ 15mm Grid
Fine Fissured				
48 x 24 x 5/8in	1730	*	*	
600 x 600 x 15mm	3510	3572	3577	
1200 x 600 x 15mm	3570	3574	*	
Fine Fissured High Acoustic				
600 x 600 x 19mm	4120	4122	*	
1200 x 600 x 19mm	4121	4123	*	
1200 x 600 x 19mm	1714AMEX	*	*	

* Special item on request. Other sizes and profiles, including K2C2 edge for semi-concealed grid systems upon request.

BioBlock not available on item 3570ATV

Contact your local Armstrong Ceilings representative for stock availability



NRC: 0.60 (Fine Fissured)
0.70 (Fine Fissured High Acoustic)



CAC: 33 (Fine Fissured Square Lay In)
35 (Fine Fissured Tegular Edge)
35 (Fine Fissured High Acoustic)
40 (Fine Fissured High Acoustic 1714AMEX)



RH99% at 0°C – 49°C



Conforms with BCA Spec. C1.10 and tested to AS/NZS 3837:1998 – Group 1, ISO 5660 – Group 1 –S



Thermal Insulation (R- Value)
0.26 m²/K/W (Fine Fissured)
0.40 m²/K/W (Fine Fissured High Acoustic)



3 kg/m² (items: 1730, 3510, 3570-3574)
5.3 kg/m² (items 4120-4123)
6.1 kg/m² (item 1714AMEX)

Material

Wet-formed mineral fibre

Surface Finish

Factory-applied vinyl latex paint with painted BioBlock™ mould/mildew inhibitor*

Backloading Recommendation

Contact your local Armstrong Ceilings representative

Recycled Content

26% for items: 1730, 3510, 3570-3574
47% for items: 4120-4123
56% for item 1714AMEX
51% for Items 3510ATV and 3570ATV

Suspension Systems

PeakForm™ Steel options above, with ARMSTRONG BLUE TONGUE® Aluminium upon request

Green Star: Potential contribution

MAN		IEQ		ENE	MAT and Mat. Calc.				
Waste Management	Daylight Factor	Noise Levels	Emissions	Energy	Modular & Design for Disassembly	Level A Certified Product	Product Stewardship	EMS to ISO 14001	Recycled Content
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓



Armstrong World Industries Pty Ltd

www.armstrongceilings.com.au

Email: scentre@armstrongceilings.com

NSW/ACT

Tel: (02) 9748 1588

VIC/TAS

Tel: (03) 8706 4000

QLD/NT

Tel: (07) 3809 5565

Inspiring Great Spaces® is a trademark of AFI Licensing LLC; Green Building Council Australia logo is a trademark of the Green Building Council of Australia; Global GreenTag^{certified}, Green Rate™ and trust brands™ are trademarks of Dual Harmony Pty Ltd; All other trademarks are property of AWI Licensing LLC and/or affiliates. © 2017 AWI Licensing LLC.

AWP1017 Printed on Zanders Mega Recycled paper

Inspiring Great Spaces®

Armstrong®
CEILING SOLUTIONS